

Attorney's Docket No.: 939-011495-US (PAR)

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): MIDTGAARD

Group No.: 2817

Serial No.: 10/663,227

Filed: September 16, 2003

Examiner:

For: ENVELOPE ELIMINATION AND RESTORATION LINEAR
AMPLIFIER


Commissioner of Patents
P.O. Box 1450
Alexandria, VA 22313

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country: Great Britain
Application Number: 0221593.7
Filing Date: 17 September 2002

WARNING: "When a document that is required by statute to be certified must be filed, a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 CFR 1.4(f) (emphasis added.)

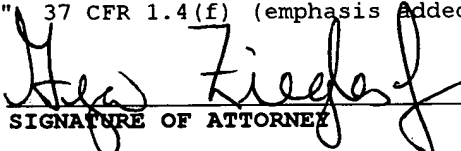
SIGNATURE OF ATTORNEY

Reg. No.: 44,004

Geza C. Ziegler, Jr.

Type or print name of attorney

Tel. No.: (203) 259-1800

Perman & Green, LLP


Customer No.: 2512

425 Post Road, Fairfield, CT 06824


NOTE: The claim to priority need be in no special form and may be made by the attorney or agent if the foreign application is referred to in the oath or declaration as required by § 1.63.

CERTIFICATE OF MAILING

I hereby certify that this correspondence is, on the date shown below, being deposited with the United States Postal Service as First Class Mail in an envelope addressed to the Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313.


Signature

Date: April 26, 2004


(type or print name of person certifying)



2

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 4 March 2004



Patents Form 1/77

Patents Act 1977
(Rule 16)

**The
Patent
Office**

13SEP02 E748981-1 D62094
P01/7700 0.00-0221593.7

Request for grant of a patent



1/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference 07 41260

2. Patent application number

0221593.7

17 SEP 2002

3. Full name, address and post code of the or each applicant

Nokia Corporation
Keilalahdentie 4
02150 Espoo
Finland

765 2217003

Patents ADP number

If the applicant is a corporate body, give the country/state of its incorporation

FI

4. Title of the invention

Envelope Elimination and Restoration Linear Amplifier

5. Name of your agent

VENNER, SHIPLEY & CO

"Address for service" in the United Kingdom to which all correspondence should be sent

20 LITTLE BRITAIN
LONDON
EC1A 7DH

Patents ADP

1669004 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and the or each application number

Country

Priority application number

Date of filing

7. If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application

Number of earlier application

Date of Filing

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "YES" if:
a) any applicant in 3. above is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body)

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) 2

Abstract 1

Drawing(s) 2 *x2*

-
10. If you are also filing any of the following state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 0

Request for preliminary examination and search (*Patents Form 9/77*) 0

Request for substantive examination (*Patents Form 10/77*) 0

Any other documents 0

-
11. I/We request the grant of a patent on the basis of this application.

Signature

James Shipley

Date

17 September 2002

-
12. Name and daytime telephone number of person to contact in the United Kingdom

STUART GEARY
020 7600 4212

Envelope Elimination and Restoration Linear Amplifier

Description

The present invention relates to an envelope elimination and restoration linear
5 amplifier.

The present trend in portable communications devices such as mobile telephones is to increasingly lightweight devices with increased talk-time between battery recharge cycles. Such developments require ever more efficient radio-frequency (RF)
10 amplifiers to minimise power consumption. In cellular systems such as GSM, the modulation scheme is a constant amplitude scheme, also referred to as constant envelope modulation, which permits use of efficient non-linear amplifiers. However, recent types of communication system such as EDGE and UMTS use non-constant envelope modulation schemes. The drawback is that the amplification
15 of non-constant envelope RF signals requires the use of linear power amplifiers, which are inherently less efficient. The lower power efficiency of linear amplifiers translates into higher power consumption and higher heat dissipation.

A variety of linearisation architectures and schemes exist, including fixed and
20 adaptive pre-distortion, adaptive bias, envelope elimination and restoration, polar loop and cartesian loop transmitters. Details of such devices are shown in "Increasing Talk-Time with Efficient Linear PA's", IEE Seminar on TETRA Market and Technology Developments, Mann S, Beach M, Warr P and McGeehan J, Institution of Electrical Engineers, 2000, which is incorporated herein by reference.
25 However, many of these devices and techniques are unsuitable for battery operated portable devices such as mobile telephones, or are incapable of meeting current RF design standards, such as the TETRA linearity standard, ETSI publication ETS 300 396-2; "Trans-European Trunked Radio (TETRA); - Voice plus Data (V+D) - Part 2: Air Interface (AI)"; March 1996.

30

Envelope elimination and restoration (EER) transmitters separate envelope and phase information from an input modulated signal. The phase information is then passed through a power amplifier as a constant envelope signal, permitting the use

of efficient, non-linear amplifiers, while the envelope signal is added to the power amplifier output. In order to correct AM-PM distortion, phase feedback is employed and the power amplifier is effectively placed within a phase-locked loop.

5 The envelope of the output signal is controlled by another feedback loop. Predistortion has been used to improve stability of the loops. However, the predistortion required is dependent on power level and does not correct for errors in the feedback path.

10 According to the present invention, there is provided an envelope elimination and restoration linear amplifier comprising an envelope control loop including a feedback path, wherein the gain of said feedback path is variable for controlling the gain of the amplifier.

15 Consequently, the predistortion required is independent of the output power level. Also, where the amplifier is used as the RF power amplifier of a transmitter, there are improvements with respect to adjacent channel power and EVM/phase error.

The gain of the feedback path may be controlled by means of a variable gain
20 amplifier and/or a variable attenuator. Such circuits are well-known in the art.

Preferably, the amplifier includes a phase control loop. More preferably, the feedback path is shared by the envelope control and phase control loops.

25 Preferably, the feedback path includes downconverter means for downconverting the frequency of the feedback signal therein. More preferably, the feedback path includes gain control means before the downconverter means.

Preferably, the gain of the feedback path is electronically controllable. More
30 preferably, the feedback path comprises variable gain means responsive to a control signal to set its gain.

The present invention is particularly applicable to the RF power amplifiers of communications devices, e.g. mobiles phones. Preferably, such devices include control means for determining a desired output power and providing a corresponding control signal to the amplifier.

5

An embodiment of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a mobile telephone handset;

Figure 2 is a schematic diagram of mobile telephone circuitry for use in the
10 telephone handset of Figure 1; and

Figure 3 is a block diagram of an embodiment of the present invention.

Referring to Figure 1, a mobile station in the form of a mobile telephone handset 1 includes a microphone 2, keypad 3, with soft keys 4 which can be programmed to
15 perform different functions, an LCD display 5, a speaker 6 and an antenna 7 which is contained within the housing.

The mobile station 1 is operable to communicate through cellular radio links with individual public land mobile networks (PLMNs) operating according to
20 communication schemes such as UMTS and EDGE.

Figure 2 illustrates the major circuit components of the telephone handset 1. Signal processing is carried out under the control of a digital micro-controller 9 which has an associated flash memory 10. Electrical analogue audio signals are produced by
25 microphone 2 and amplified by pre-amplifier 11. Similarly, analogue audio signals are fed to the speaker 6 through an amplifier 12. The micro-controller 9 receives instruction signals from the keypad and soft keys 3, 4 and controls operation of the LCD display 5.

30 Information concerning the identity of the user is held on a smart card 13 in the form of a GSM SIM card which contains the usual GSM international mobile subscriber identity (IMSI) and an encryption key K_i that is used for encoding the

radio transmission in a manner well known per se. The SIM card is removably received in a SIM card reader 14.

The mobile telephone circuitry includes a codec 15 and an rf stage 16 including a power amplifier stage 17 feeding the antenna 7. The codec 15 receives analogue signals from the microphone amplifier 11, digitises them into an appropriate signal format and feeds them to the power amplifier stage 17 in the rf stage 16 for transmission through the antenna 7 to the PLMN shown in Figure 1. Similarly, signals received from the PLMN are fed through the antenna 7 to be demodulated in the rf stage 16 and fed to codec 15, so as to produce analogue signals fed to the amplifier 12 and speaker 6.

Referring to Figure 3, the power amplifier stage 17 comprises an envelope elimination and restoration (EER) amplifier 18 which separates the envelope and phase components of an input modulated IF signal into two separate forward paths 19, 20. A common feedback path 21 is used for control of both the envelope and phase components of the RF output by the amplifier stage 17.

The envelope forward path 19 comprises first and second envelope detectors 22, 23 which detect the envelopes of the input modulated IF signal and the feedback signal from the feedback path 21 respectively. The outputs of the envelope detectors 22, 23 are fed to respective inputs of a comparator 24. The output of the comparator 24 is filtered by a low-pass filter 25 and applied to an envelope controller 26.

The envelope controller 26 comprises a fast power supply modulator which directly modulates the supply voltage of the actual power amplifying part 27.

The phase forward path 20 comprises first and second limiters 28, 29 which limit the input modulated IF signal and the feedback signal respectively to produce respective constant-amplitude signals. The constant amplitude signals are applied to a phase detector 30 and the output of the phase detector 30 is filtered by a low-pass filter 31 and applied to a voltage-controlled oscillator 32 as is conventional in a phase-lock loop. The RF signal produced by the voltage-controlled oscillator 32 is

input into the power amplifying part 27 which amplifies it in dependence on the signal input to the envelope controller 26.

5 The output of the power amplifying part 27 is fed to an antenna and a variable gain amplifier 33. The output of the variable gain amplifier 33 is connected to one input of a mixer 35. The other input of the mixer 35 receives a local oscillator signal. The output of the mixer is low-pass filtered by a feedback path filter 36 to select a low frequency mixing product. Thus, the mixer 35 and filter 36 act to down convert the RF output of the amplifying part 27 to the IF signal frequency.

10

The output of the feedback path filter 36 is fed to the inputs of the second envelope detector 23 and the second limiter 29 to complete the feedback paths of the envelope and phase control loops.

15 In operation, the IF input is provided at a constant level, irrespective of the output power level required, and with a constant predistortion applied by a predistortion circuit 37. The predistortion required will depend on the particular circuitry employed and the technique is well-known in the art. The output power of the power amplifying part 27 is controlled by controlling the gain of the variable gain
20 amplifier 33. The gain of the variable gain amplifier 33 is set by a power control signal (P) from the mobile phone's controller 9 (Figure 2).

It will be appreciated that if the gain of variable gain amplifier 33 is reduced, the output power of the power amplifying part 27 will increase and vice versa.

25

It will be appreciated that many alterations to the above-described embodiment may be made.

Claims

1. An envelope elimination and restoration linear amplifier comprising an envelope control loop including a feedback path, wherein the gain of said feedback
5 path is variable for controlling the gain of the amplifier.
2. An amplifier according to claim 1, including a phase control loop.
3. An amplifier according to claim 2, wherein said feedback path is shared by
10 the envelope control and phase control loops.
4. An amplifier according to claim 1, 2 or 3, wherein said feedback path includes downconverter means for downconverting the frequency of the feedback signal therein.
15
5. An amplifier according to claim 4, wherein said feedback path includes gain control means before the downconverter means.
6. An amplifier according to any preceding claim, wherein the gain of the
20 feedback path is electronically controllable.
7. An amplifier according to claim 6, wherein the feedback path comprises variable gain means responsive to a control signal to set its gain.
- 25 8. A communications device including an RF power amplifier according to claim 6 or 7.
9. A communications device according to claim 8, including control means for determining a desired output power and providing a corresponding control signal to
30 the amplifier.
10. A communications devices according to claim 8 or 9, including predistortion means for predistorting an input signal to compensate for signal distortion in the

amplifier, the output of the predistortion means forming the input for the amplifier, wherein the predistortion applied by the predistortion means is independent of the gain of the amplifier.

Abstract

Envelope Elimination and Restoration Linear Amplifier

The gain of an envelope elimination and restoration linear amplifier is controlled by
5 controlling the gain of its envelope control feedback path.

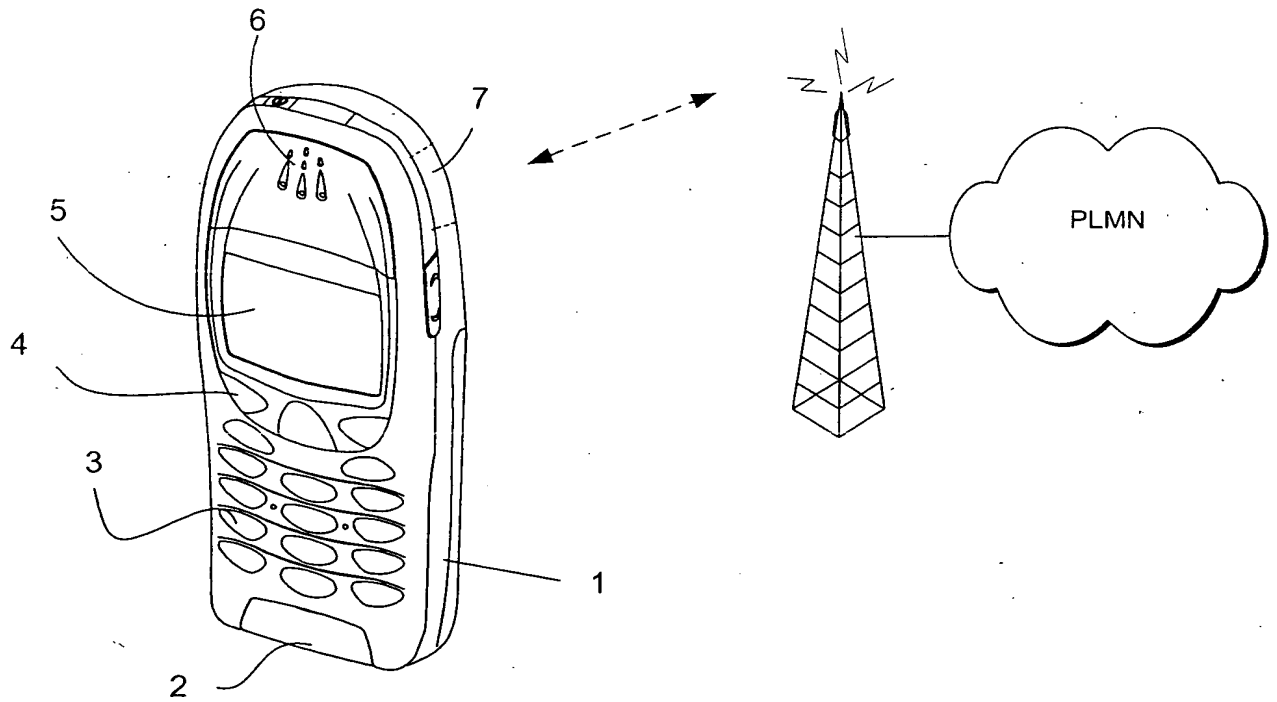


Figure 1

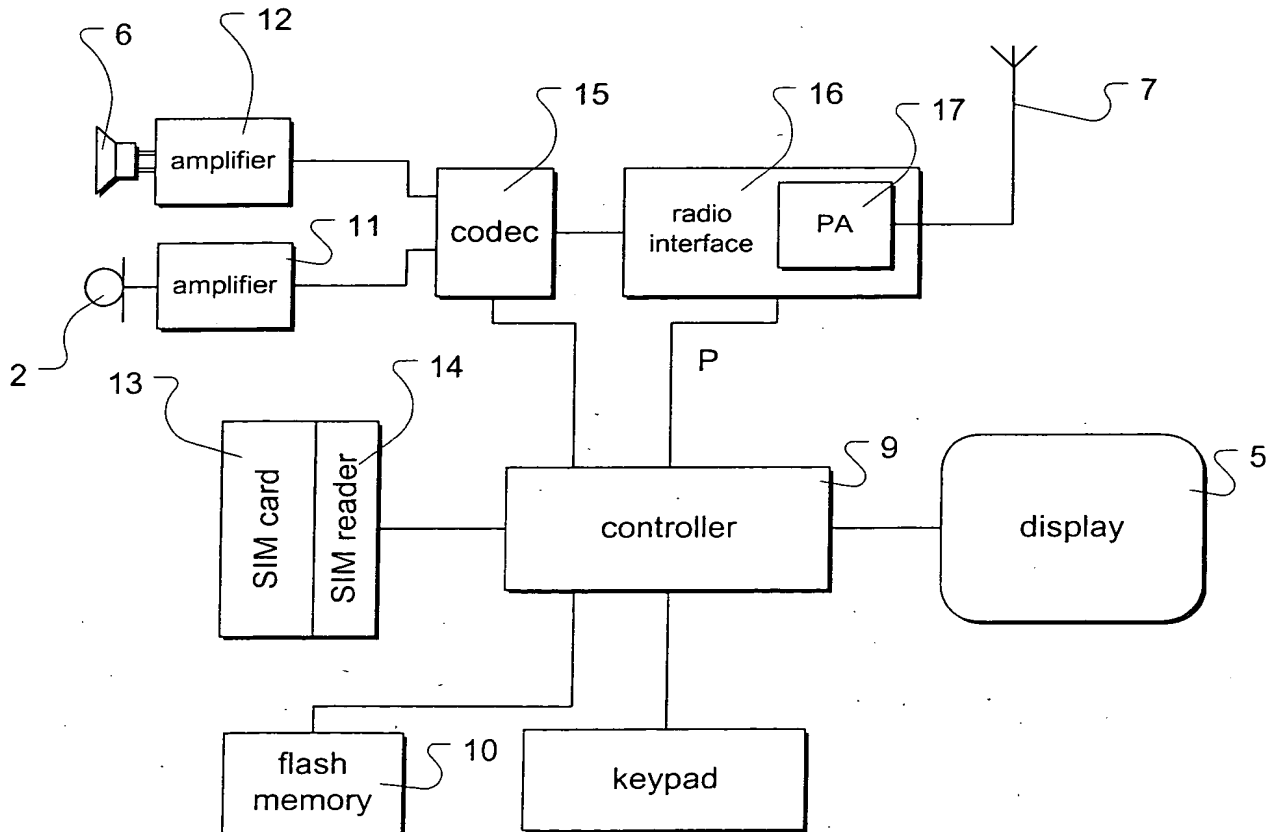


Figure 2

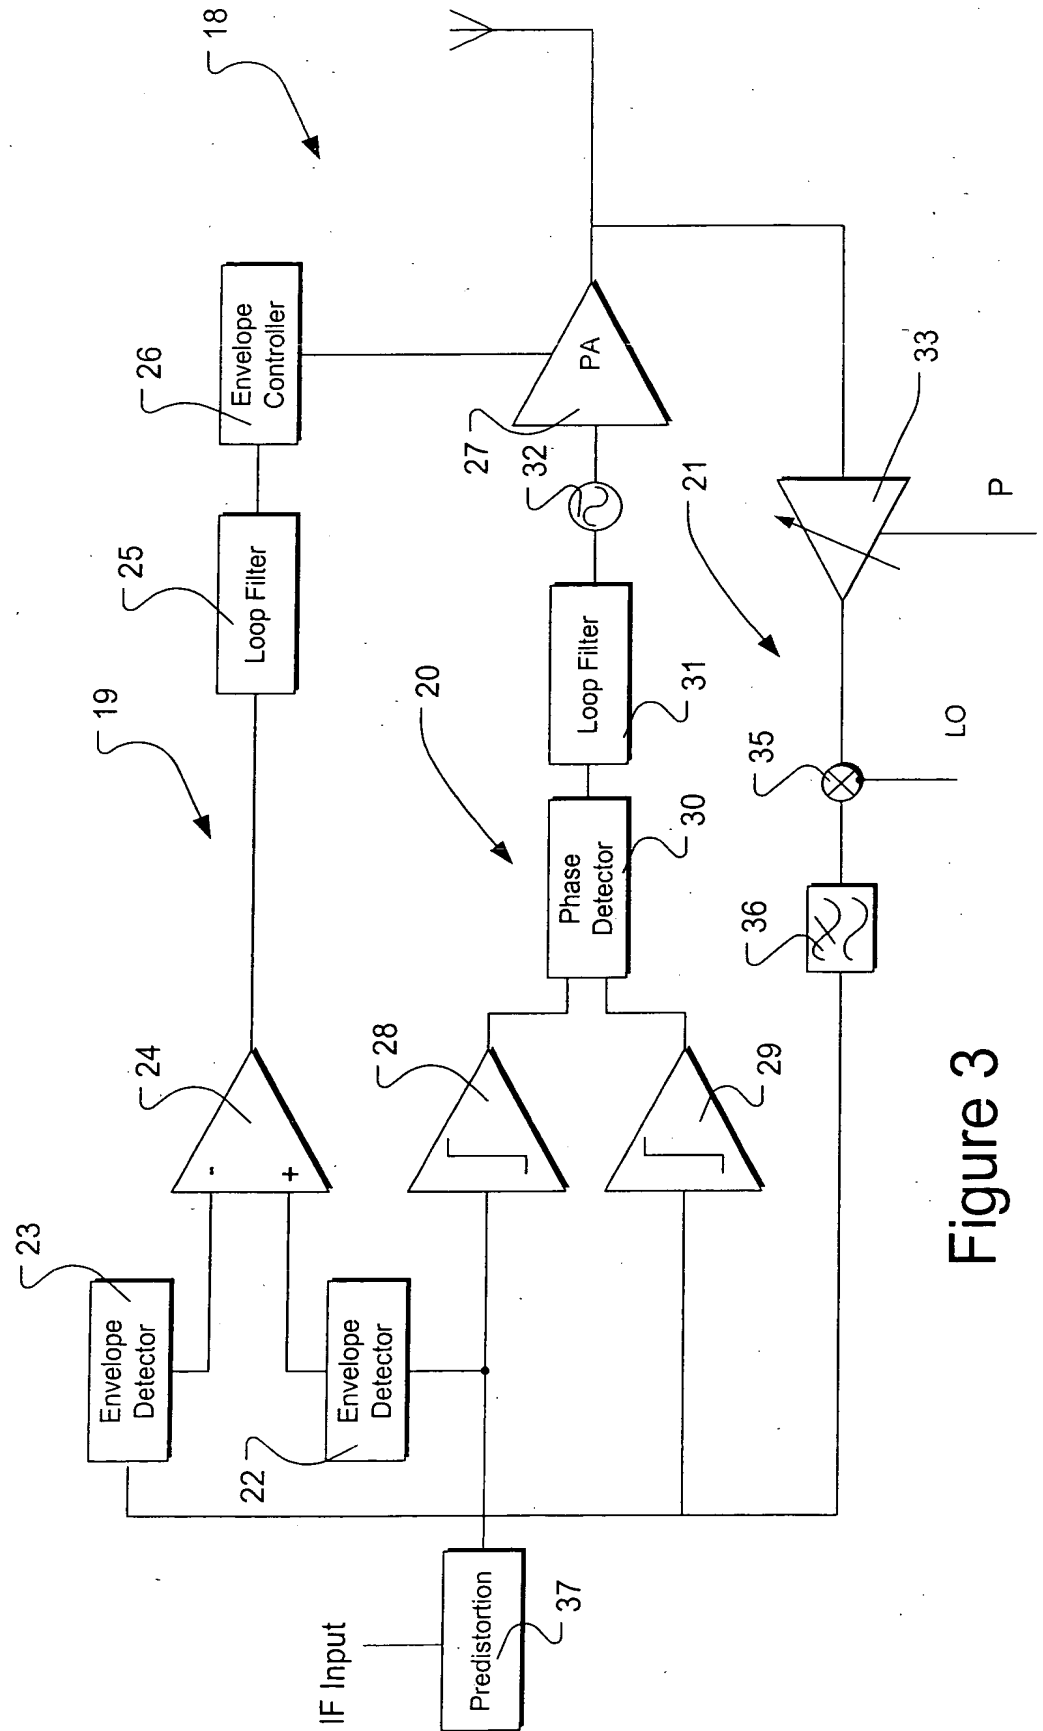


Figure 3



...

...